


- a. 3" X 6" SLOT IN FLOOR FOR ELECTRIC SERVICE ENTRANCE TO C.B. PANEL ABOVE
- 6. 3" X 4" ANGLE WITH 3/4" ANCHOR HOLES. ANCHOR BOOTH AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED 6 HOLES REQ'D.
- c. DUTER EDGE OF BASE.
- d. DUTER EDGE OF BOOTH & ANGLE BRICK LEDGE.

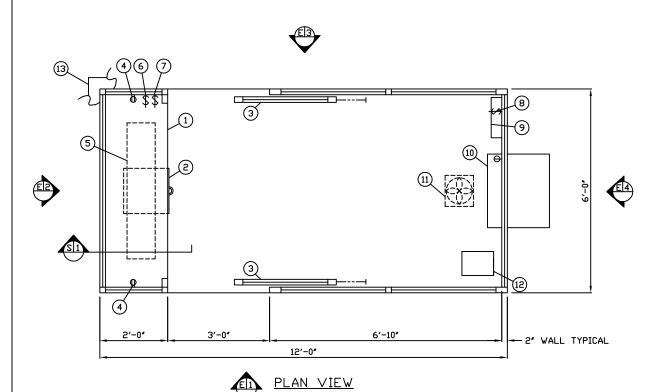

- 1. COUNTER- 22" DEEP PAINTED GALVANIZED STEEL 32" ABOVE FINISH FLOOR.
- 2. R-1 LOCKING CASH DRAWER WITH REMOVABLE MONEY TRAY
- 3. DODR- 36" WIDE, SLIDING STEEL WITH WEATHER-STRIPPING, BALL BEARING HANGERS, SAFETY GLAZING, HEAVY DUTY TRACK, LOCK, & HARDWARE, 2-REQ'D.
- 4. GFI DUTLET- MOUNTED ABOVE COUNTER, 2-REQ'D.
- 5. FLUORESCENT LIGHT FIXTURE WITH VANDAL RESISTANT LENS.
- 6. SWITCH FOR FUTURE EXTERIOR LIGHTS, TWO EXTERIOR INCANDESCENT DOWN LIGHT FIXTURES AND LAMPS. PROVIDED BY PAR-KUT AND INSTALLED ON SITE BY OTHERS.
- 7. SWITCH FOR INTERIOR LIGHT.
- 8. SWITCH FOR EXHAUST FAN.
- 9. C.B. PANEL- 120/240V. 1Ø-3 WIRE WITH GROUND BAR. MAIN BREAKER INCLUDED.
- 10. COMBINATION HEAT/COOL- 240V./11,600 BTU WALL MOUNTED WITH INTEGRAL THERMOSTAT CONTROL.
- 11. 80 CFM MIN. EXHAUST FAN-VENT DUTSIDE DF ROOF VIA 3" DIAMETER PIPE. FIELD CONNECTED TO EXHAUST THROUGH GABLE END BY OTHERS.
- 12. FLOOR SAFE GARDALL RC1218K WITH CASH SLOT AND KEY CYLINDER,
- 13. BRICK GUARD COVER- MOUNTED 40" ABOVE GRADE TO BOTTOM INSIDE EDGE.

NOTE: PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED GALVANIZED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

- A. GLAZING TO BE 1/4" GRAY TINTED POLYCARBONATE SAFETY GLAZING SET IN ANODIZED ALUMINUM WINDOW FRAMES. OPERATING WINDOWS WILL BE PROVIDED WITH INSECT SCREENS
- B. PAINT- A RUST INHIBITIVE PRIMER WITH AN INDUSTRIAL FINISH.
- C. ELECTRICAL- ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN 1/2"(MIN) E.M.T. PER NATIONAL ELECTRIC CODE. FITTINGS, FIXTURES & DEVICES ARE U.L. LABELED. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.
- D. BOOTH WILL NOT HAVE A CANOPY OVERHANG.
- E. LIFTING RING(S) ARE PROVIDED IN ROOF.
- F. NO ON SITE WORK BY PAR-KUT.
- G. RECESSED LIGHTS SHIPPED LOOSE FOR FIELD INSTALLATION BY OTHERS.

