


A.D.A. NOTE
 BOOTH MUST BE HANDICAP ACCESSIBLE. THE FOUNDATION MAY BE RECESSED OR A 1:12 RAMP MUST BE PROVIDED SO THAT MAXIMUM CHANGE IN LEVEL FROM GRADE TO FINISH FLOOR DOES NOT EXCEED 1/4"

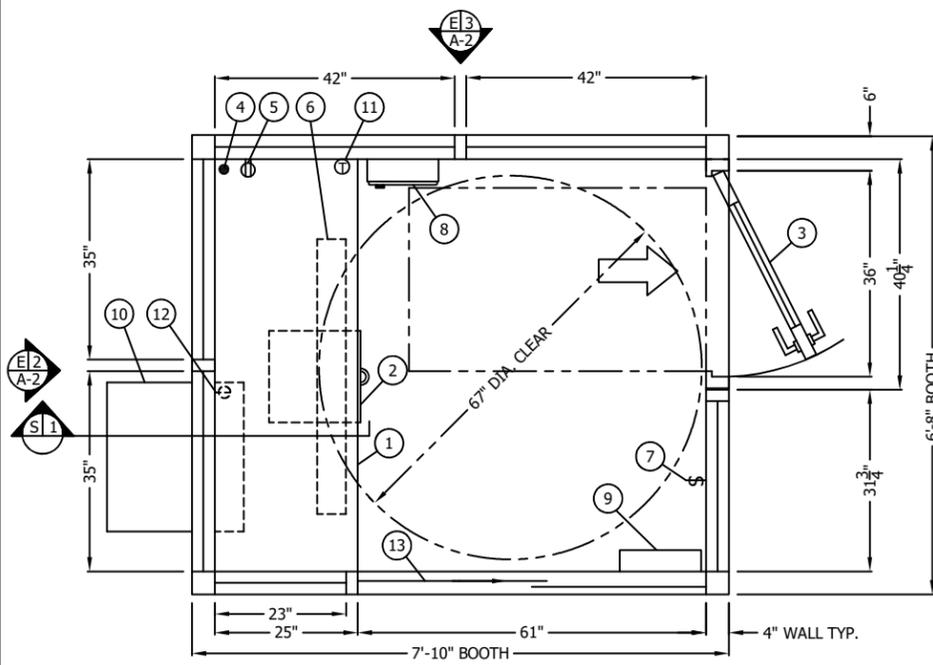

PLAN VIEW

NOTE: THIS BOOTH IS DESIGNED FOR INTERIOR / SHELTERED USE AND NOT INTENDED FOR PERMANENT EXPOSURE TO PRECIPITATION.

| SERVICE ENTRANCE/ANCHOR BOLT LAYOUT | | |
|-------------------------------------|--|------|
| ITEM | DESCRIPTION | QTY. |
| a | 3" X 6" SLOT IN FLOOR WITH 5" X 8" REMOVABLE SCREW-DOWN ALUMINUM TREADPLATE LID, (2) SCREWS REQ'D. ONE AT EACH END, FOR ELECTRICAL SERVICE ENTRANCE TO C.B. PANEL. | 1 |
| b | 2" X 2" X 1/4"(MIN) STEEL ANCHOR CLIP WITH A 3/4" ANCHOR BOLT HOLE, ONE EACH CORNER. ANCHOR BUILDING AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED. | 4 |
| c | OUTER EDGE OF BUILDING | 1 |
| d | BASE PERIMETER FRAME | 1 |
| e | INTERIOR WALL FACE | 1 |
| f | SUGGESTED MINIMUM FOUNDATION | 1 |

| GENERAL SITE INSTALLED ITEMS PROVIDED BY OTHERS | |
|---|--|
| 1 | PROVIDE 120V/240V, SINGLE PHASE, 3-WIRE SERVICE WITH GROUND. (CAN BE WIRED AS SINGLE PHASE 120/208V) |
| 2 | CONCRETE FOUNDATION MINIMUM 6" DEEP, 3,000 PSI MINIMUM (28 DAY ACI 318). THE FOUNDATION SHOULD BE A MINIMUM OF 24" WIDER THAN THE BUILDING FOOT PRINT DIMENSIONS. THIS IS TO PROVIDE A 12" CONCRETE BORDER ON EACH SIDE OF THE BUILDING. |
| 3 | ADEQUATE SIZE DRILLED ANCHOR BOLTS. SUGGESTED SIZE: 5/8" X 4 1/2" POWER FASTENERS "POWER STUD" CATALOG #7332. |

GENERAL CONSTRUCTION NOTES

PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

GLAZING - TEMPERED SAFETY GLAZING SET IN PAINTED GALVANIZED STEEL EXTERIOR WINDOW FRAMES WITH INTERIOR ALUMINUM GLAZING STOPS.

GLAZING - TEMPERED SAFETY GLAZING SET IN WOJAN ALUMINUM WINDOW FRAMES.

PAINT - FINISH SHALL BE SINGLE COLOR OF CHOICE UNLESS OTHERWISE SPECIFIED, AXALTA IMRON POLYURETHANE INDUSTRIAL COATING. SHALL BE APPLIED TO ALL EXPOSED METAL SURFACES. THIS EXCLUDES ROOF SURFACE, ALUMINUM WINDOW FRAMES AND ANY STAINLESS STEEL COMPONENTS (IF USED).

ELECTRICAL - ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN 1/2"(MIN) E.M.T. AND FLEXIBLE METAL CONDUIT WHERE APPLICABLE PER NATIONAL ELECTRIC CODE. ALL ELECTRICAL EQUIPMENT WILL BE LISTED BY U.L. OR EQUIVALENT RECOGNIZED NATIONAL TESTING LABORATORY. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.

BOOTH WILL HAVE NO CANOPY OVERHANG ON ANY SIDE.


REMOVABLE LIFTING RING(S) ARE PROVIDED ON ROOF.

LIFTING RING(S) ARE DESIGNED FOR A STRAIGHT VERTICAL LIFT ONLY. SPREADER BARS MUST BE USED WHERE APPLICABLE TO ENSURE STRAIGHT VERTICAL LIFT. ALL WARRANTIES WILL BE **VOID** IF NOT LIFTED IN THIS MANNER.

NO ON SITE WORK BY PAR-KUT.


ACTUAL LOCATION OF ELECTRICAL DEVICES MAY VARY DUE TO INSTALLATION CONSTRAINTS, SHIPPING RESTRICTIONS, OR FOR PROPER PLACEMENT TO SATISFY APPLICABLE CODES.

| LINE ITEMS | | |
|------------|--|-----|
| ITEM # | DESCRIPTION | QTY |
| 1 | COUNTER - 25" DEEP PAINTED GALVANIZED STEEL MOUNTED 32" A.F.F. | 1 |
| 2 | PAINTED STORAGE DRAWER. | 1 |
| 3 | DOOR - 3068 SWINGING STEEL WITH WEATHER-STRIPPING, BALL BEARING BUTTS, SAFETY GLAZING, HYDRAULIC CLOSER, LEVER HANDLE LOCKSET, AND HARDWARE. | 1 |
| 4 | 2" DIAMETER HOLE IN COUNTER FOR DROP CORDS. | 1 |
| 5 | DUPLEX OUTLET MOUNTED ABOVE COUNTER. | 1 |
| 6 | INTERIOR LIGHT WITH WALL SWITCH - 48" LED LIGHT FIXTURE WITH ACRYLIC LENS. | 1 |
| 7 | WALL SWITCH FOR INTERIOR LIGHT. | 1 |
| 8 | HEATER- WALL MOUNTED WITH INTEGRAL THERMOSTAT CONTROL. | 1 |
| 9 | CIRCUIT BREAKER PANEL - 12 SPACE, 120/240V, 1Ø-3 WIRE WITH GROUND BAR, 100 AMP MAIN BREAKER, AND ALL BRANCH BREAKERS FOR FACTORY INSTALLED DEVICES PROVIDED. | 1 |
| 10 | OPTIONAL AIR CONDITIONER WALL MOUNTED, WITH WALL MOUNTED THERMOSTAT CONTROL. | 1 |
| 11 | WALL MOUNTED THERMOSTAT FOR OPTIONAL AIR CONDITIONER. | 1 |
| 12 | RECEPTACLE FOR OPTIONAL AIR CONDITIONER. | 1 |
| 13 | HORIZONTAL SIDE-SLIDE WINDOW WITH WINDOW ABOVE MOUNTED 32" A.F.F. (61"W X 50-1/4"H) | 1 |

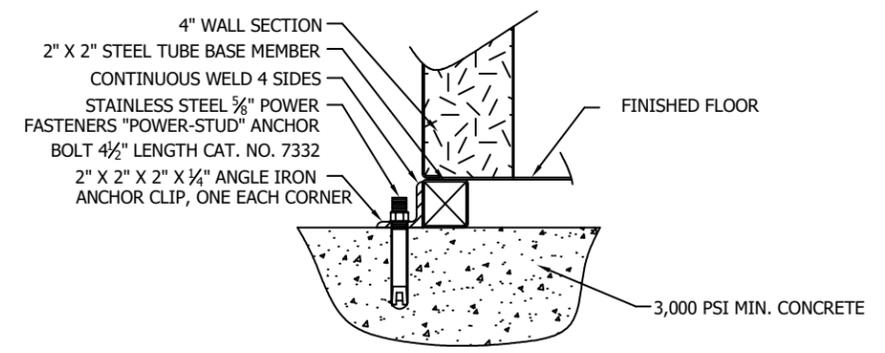

FIELD DRILLED ANCHOR BOLT DETAIL
 NO SCALE

THIS DRAWING IS FOR REFERENCE PURPOSES ONLY. PAR-KUT BUILDINGS MUST BE SECURELY ANCHORED IN PLACE AND ELECTRICAL SYSTEM MUST BE PROPERLY GROUNDED. ADEQUATE SIZED ANCHOR BOLTS SHALL BE USED. THE SIZE AND DEPTH OF THE ANCHORS SHOULD BE OF SUFFICIENT DESIGN TO WITHSTAND THE HIGHEST RECORDED WIND SPEEDS/SEISMIC DESIGN CATEGORY IN THE AREA OF INSTALLATION. CONSULT A PROFESSIONAL ENGINEER FAMILIAR WITH THE WEATHER CONDITIONS IN THE AREA.

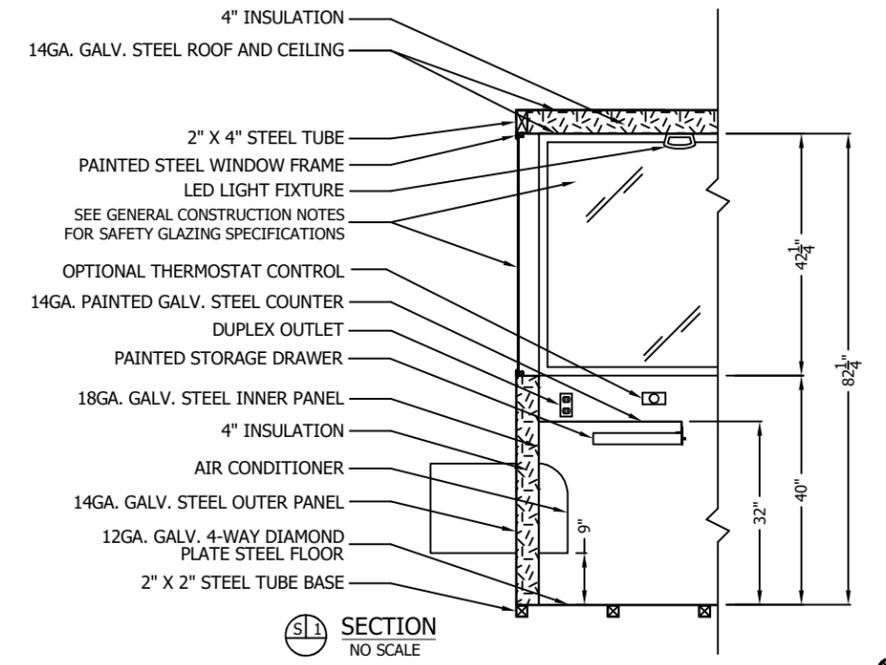

SECTION
 NO SCALE

ATTENTION DESIGN REVIEWER/SITE CONTRACTOR/INSTALLER:

VERIFICATION OF CLEARANCE IS SUGGESTED ALONG THE TRAVEL PATH OF THIS STRUCTURE TO THE FINAL ANCHORING LOCATION.

MINIMUM CLEARANCE REQUIRED IS 7'-5".

PLEASE TAKE INTO CONSIDERATION THE OVERALL LENGTH AND WIDTH OF THE STRUCTURE AS IT RELATES TO PEAKS AND VALLEYS ALONG THE TRAVEL PATH AND NOT JUST A SINGLE POINT MEASUREMENT.

GENERAL NOTES & COLORS

HIGH GLOSS PAINT COLOR: TBD
 GLAZING TINT COLOR: TBD

SHIPPING NOTES

OVERALL SHIPPING DIMENSIONS: 6'-8"W X 7'-10"L X 7'-7"H ±
 ESTIMATED WEIGHT: 2,800 LBS. ±
 SHIP TO ADDRESS:

SOME ITEMS MAY BE SHIPPED LOOSE TO MEET SHIPPING CONSTRAINTS. **DRAIN DOWNSPOUTS ARE SHIPPED LOOSE AND INSTALLED ON SITE BY OTHERS.**

NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.


PAR-KUT INTERNATIONAL, INC.
 40961 Production Drive
 Harrison Twp., Mich.
 48045-1351
 PH. (586) 468-2947
 www.parkut.com

DWG# PK75hcg SHEET A-1


STANDARD GARAGE BOOTH
 MODEL 75HCG
 ADA

PO#
 SCALE 3/8"=12" DRAWN BY DPH REVISED 4-15-2025
 DATE 11-28-2016 SIZE 6'-8" X 7'-10" QTY
 CHK'D BY: SALES REPRESENTATIVE




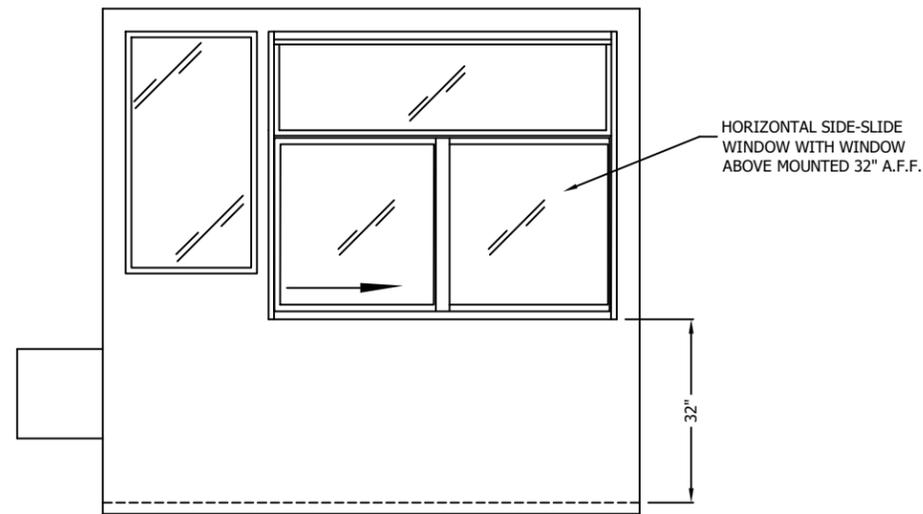


E1
A-1 ELEVATION

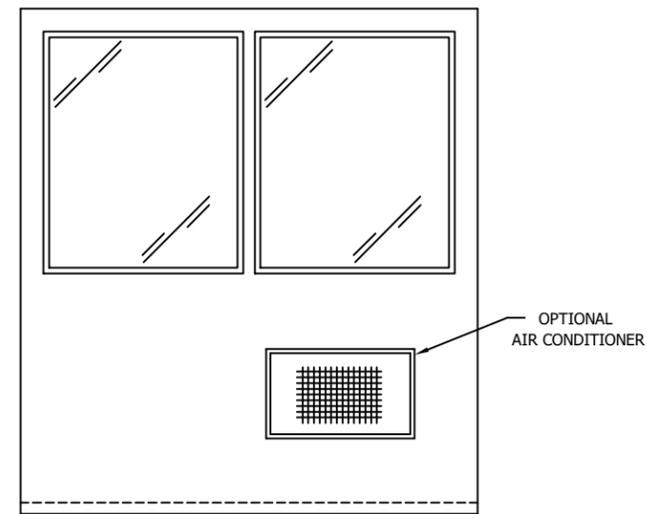

E2
A-1 ELEVATION

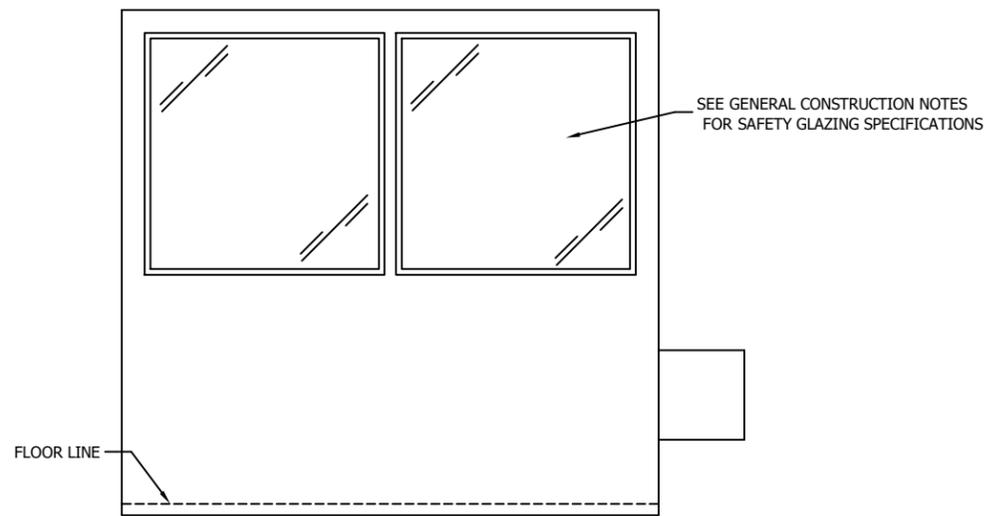

E3
A-1 ELEVATION

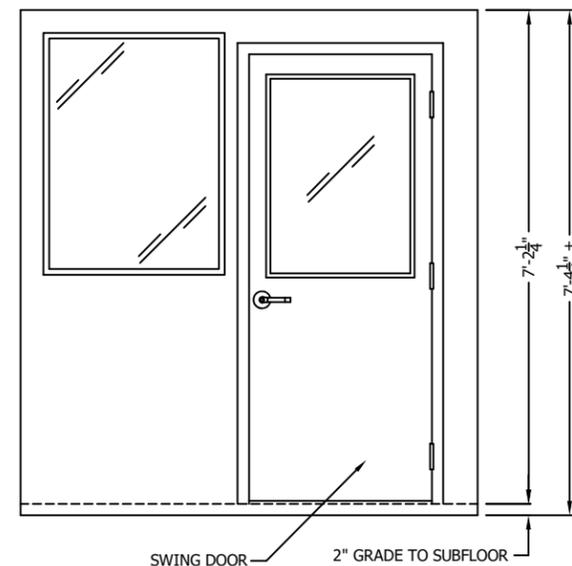

E4
A-1 ELEVATION

NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.

PAR-KUT INTERNATIONAL, INC.
40961 Production Drive
Harrison Twp., Mich.
48045-1351
PH. (586) 468-2947
www.parkut.com



DWG# PK75hcg SHEET A-2

STANDARD GARAGE BOOTH
MODEL 75HCG
ADA

| | | |
|-------------------|------------------------|----------------------|
| SCALE 3/8"=12" | DRAWN BY DPH | REVISED 4-15-2025 |
| 11-28-2016 | SIZE 6'-8" X 7'-10" | QTY |
| CHK'D BY: | SALES REPRESENTATIVE | |