



NOTE: PROVIDE 120/240V. 1Ø-3 WIRE SERVICE WITH GROUND.
SERVICE ENTRANCE/ANCHOR BOLT LAYOUT

1. COUNTER- 24" DEEP PAINTED GALVANIZED STEEL 32" ABOVE FLOOR.
2. PAINTED STORAGE DRAWER BENEATH COUNTER.
3. DOOR- 25" WIDE, SLIDING STEEL WITH WEATHER-STRIPPING, BALL BEARING HANGERS, SAFETY GLAZING, SLIDE UP CASHIER WINDOW, HEAVY DUTY TRACK, LOCK, & HARDWARE.
4. DUPLEX OUTLET- MOUNTED BELOW COUNTER.
5. LIGHT SWITCH FOR INTERIOR LIGHT.
6. LIGHT- 2-20 WATT LAMP FLUORESCENT RECESSED LIGHT FIXTURE WITH LENS.
7. HEATER- 240V./5,600 WATT FAN FORCED WITH INTEGRAL THERMOSTAT CONTROL.
8. AIR CONDITIONER- 120V./13,500 BTU ROOF MOUNTED WITH INTEGRAL THERMOSTAT CONTROL.
9. C.B. PANEL- 120/240V. 1Ø-3 WIRE WITH GROUND BAR. MAIN BREAKER NOT INCLUDED.
10. ANCHOR CLIP- 2" X 2" STEEL WELDED TO BASE AT GRADE WITH 3/4" ANCHOR BOLT HOLE. 4-REQ'D. ANCHOR BOOTH AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED.

NOTE: PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED GALVANIZED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

- A. GLAZING TO BE 3/16" CLEAR MAR RESISTANT POLYCARBONATE SAFETY GLAZING IN CURVED ENDS ONLY AND CLEAR TEMPERED SAFETY GLAZING IN FLAT SIDES ONLY WITH ALUMINUM GLAZING STOPS.
- B. PAINT- A RUST INHIBITIVE EPOXY PRIMER WITH INDUSTRIAL ENAMEL FINISH. (PLEASE SPECIFY COLOR)
- C. ELECTRICAL- ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN 1/2"(MIN) E.M.T. PER NATIONAL ELECTRIC CODE. FITTINGS, FIXTURES & DEVICES ARE U.L. LABELED. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.
- D. BOOTH WILL NOT HAVE A CANOPY OVERHANG.
- E. LIFTING RING(S) ARE PROVIDED IN ROOF.
- F. NO ON SITE WORK BY PAR-KUT.

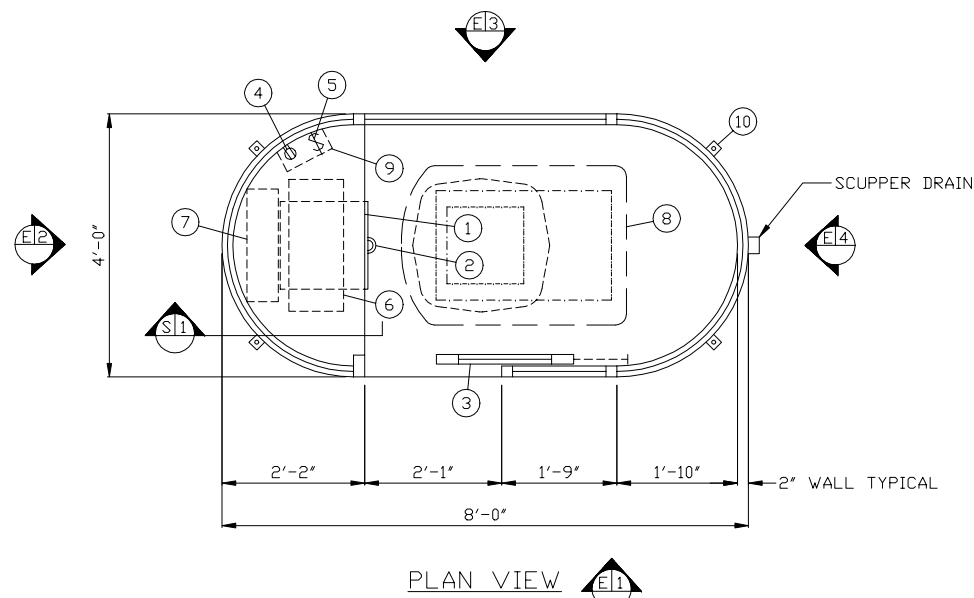

NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.

PAR-KUT INTERNATIONAL, INC. 40961 Production Drive Harrison Twp, Mich. 48045-1351 PH. (810) 468-2947		
DWG# 99125	SHEET A-1	
EDWARDS HOSPITAL MCGANN AND ASSOCIATES NAPERVILLE, IL		
PO# VERBAL	SCALE	DATE
NTS	4' X 8'	2-9-99
DRAWN BY	QTY	CHK'D BY:
AJP	1	SALES REPRESENTATIVE
		TDM DUEMLING

A/E NOTES	
ENAMEL COLOR:	
EMT CONDUIT.	